

# MP86 Dip Pushbutton Switches (W/LED, Transparent Cap), Lock Type NEW

**LICO**




## SPECIFICATION:


CIRCUIT	: SPDT.
CURRENT RATING	: 12mA.
VOLTAGE RATING	: 24V DC.
CONTACT RESISTANCE	: 50mΩ Max.(initial)
INSULATION RESISTANCE	: 100MΩ Min.
OPERATING FORCE	: 170gf ± 50gf.
TOTAL TRAVEL	: 2.5mm±0.2mm.
OPERATING LIFE	: 500,000 Cycles Min.
SOLDERING TEMPERATURE	: 250°C Max. for 3 sec.
FUNCTION	: Momentary.
OPERATING TEMPERATURE	: +10°C ~ +60°C.

## MATERIALS:


CAP	: ABS.
CASE	: Nylon.
FIXED CONTACT	: PBS+Au.
MOVING CONTACT	: PBS+Au.

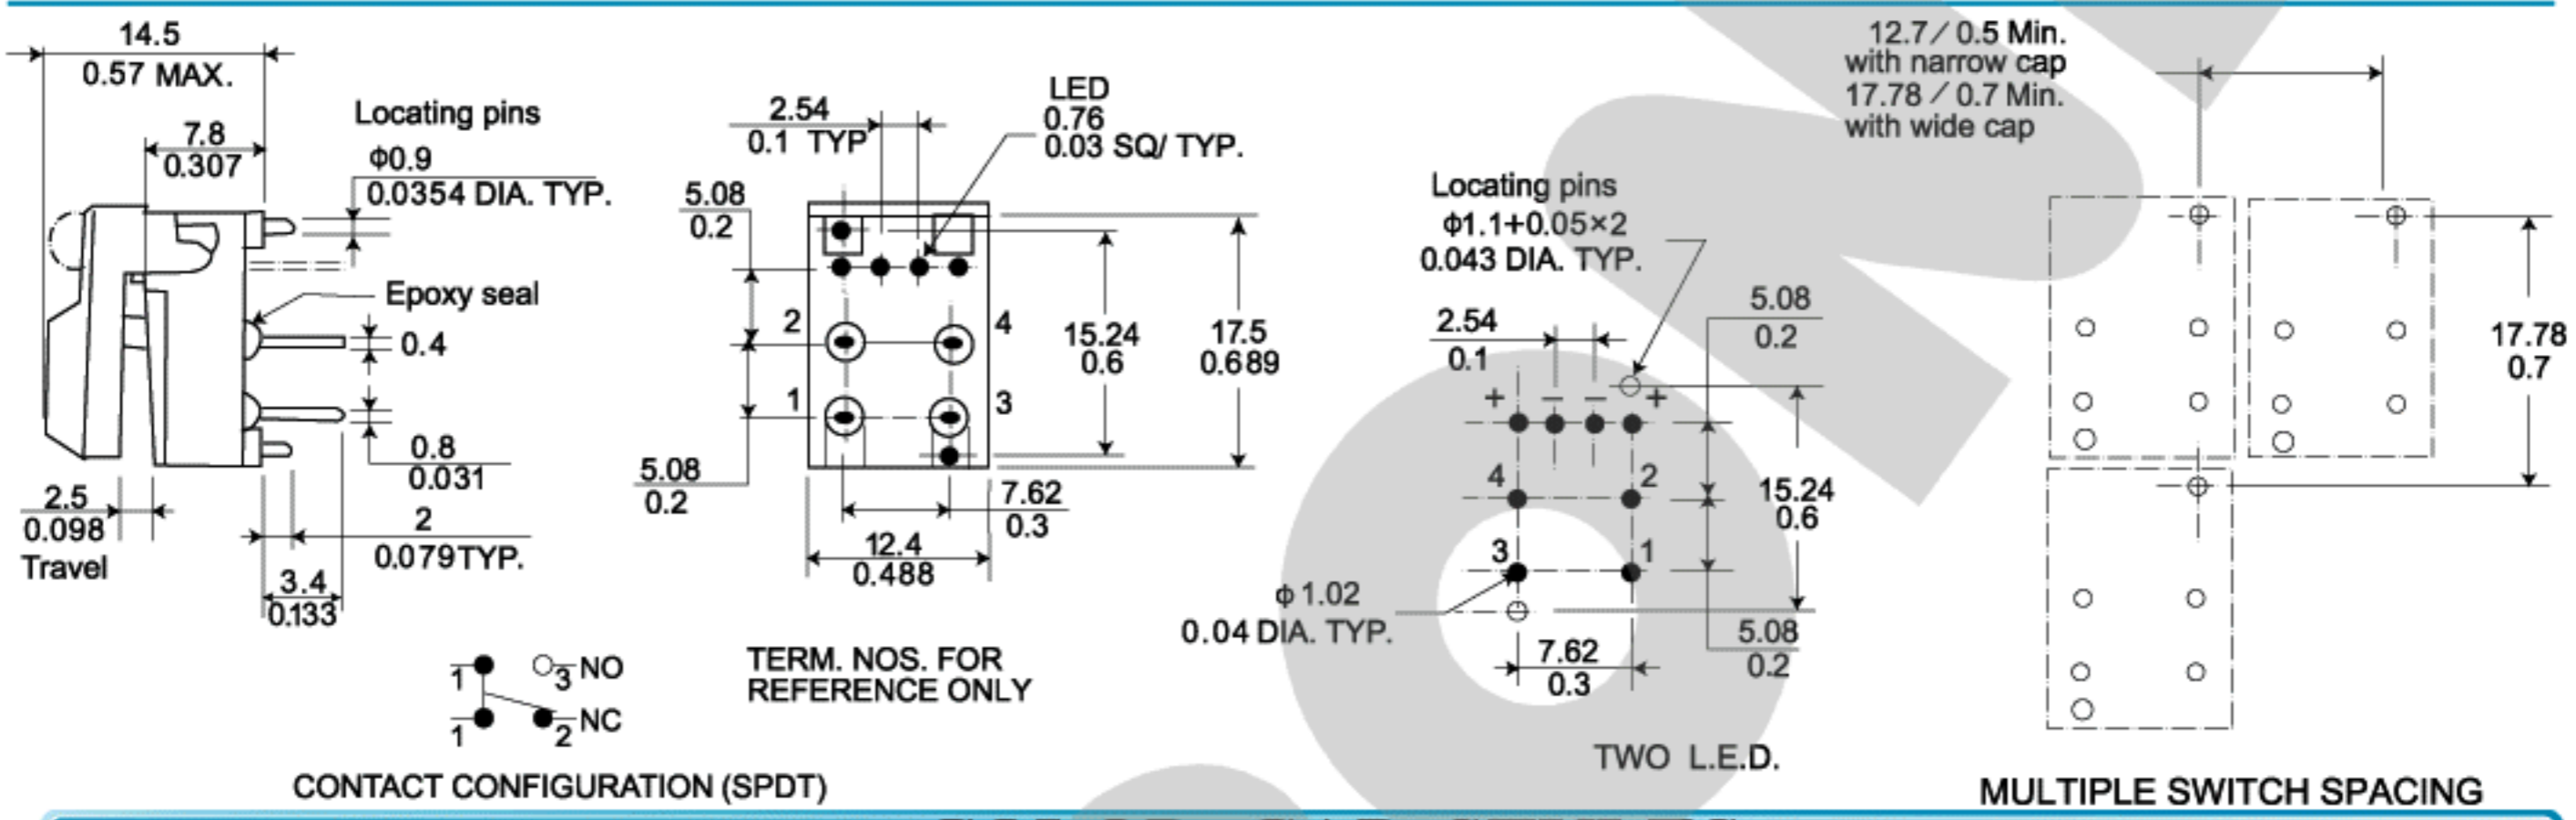

## COLOR CAP STYLES

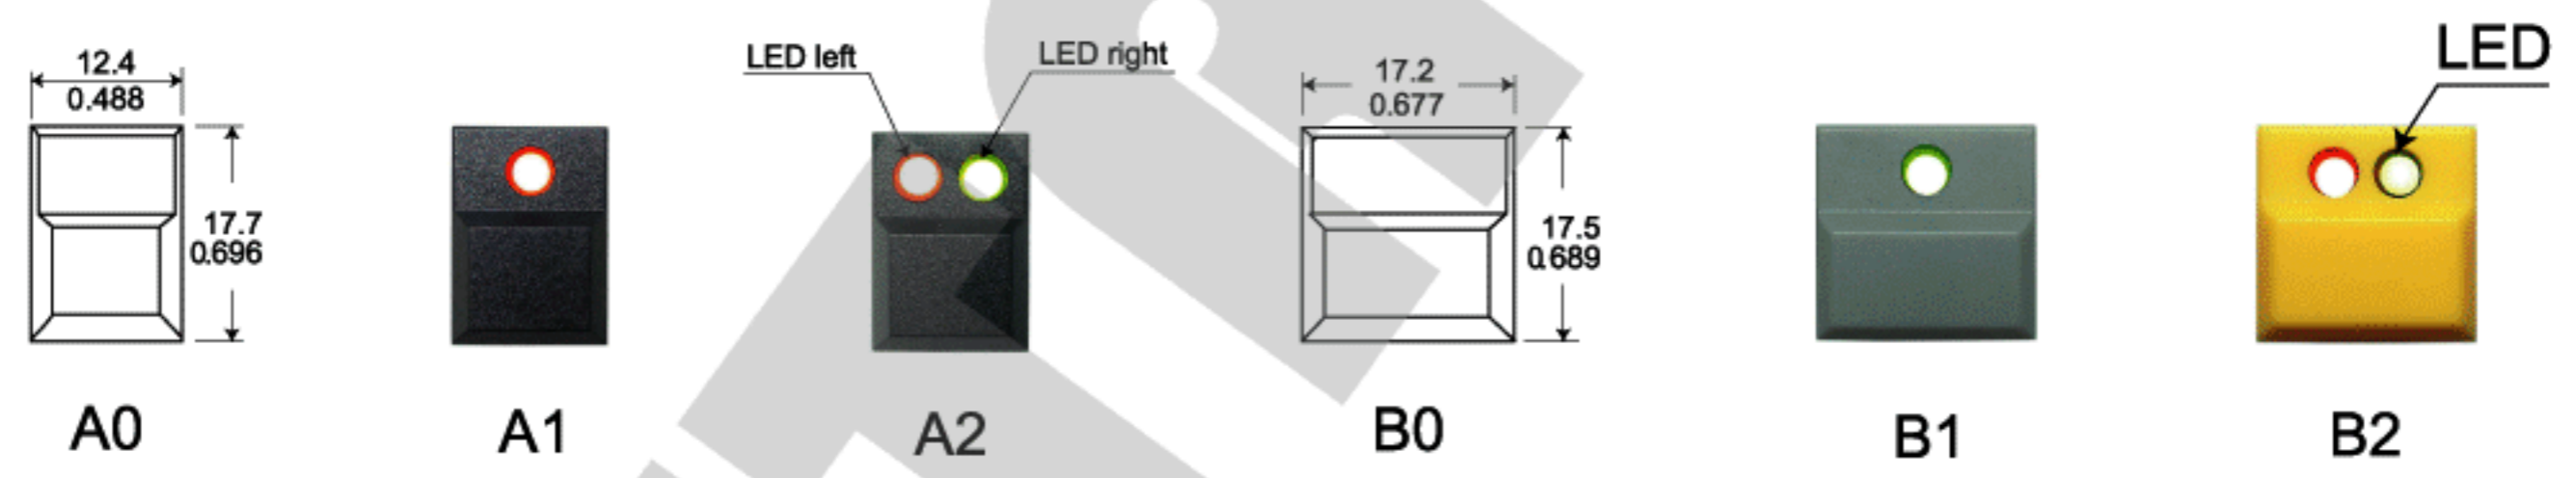

## TRANSPARENT CAP STYLES

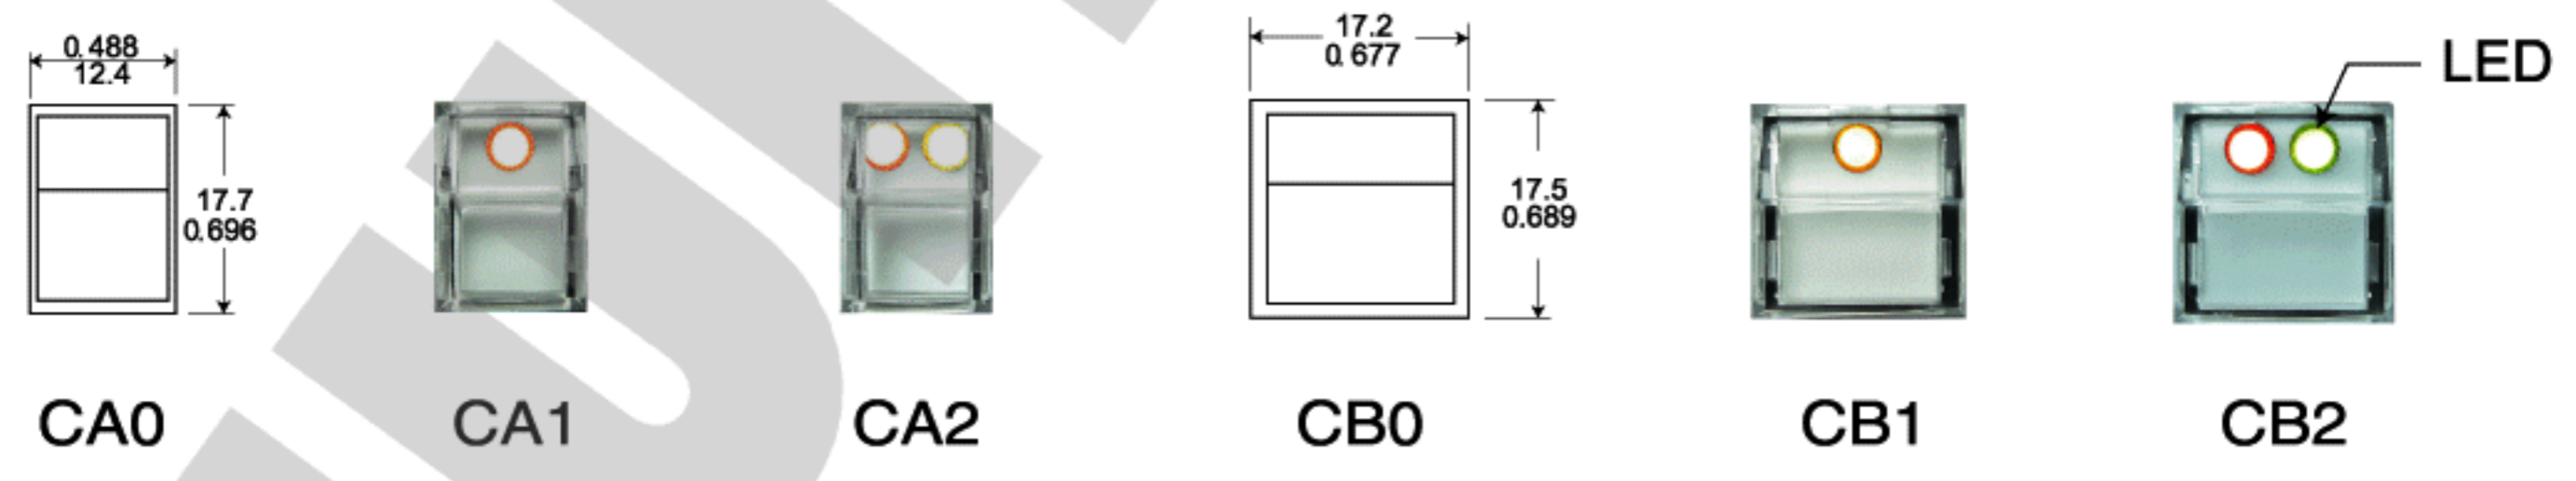

## HOW TO ORDER

<b>MODEL NO.</b>	+	<b>CAP STYLE</b>	+	<b>CAP COLOR (A&amp;B CAP STYLE ONLY)</b>	+	<b>LED COLOR LEFT</b>	+	<b>LED COLOR RIGHT</b>
MP86 : Momentary Type MP86L : Lock Type		A0 CA0 A1 CA1 A2 CA2 B0 CB0 B1 CB1 B2 CB2		R : RED BU : BLUE G : GRAY GN : GREEN B : BLACK BR : BROWN W : WHITE Y : YELLOW O : ORANGE		□ : WITHOUT LED 1 : RED 2 : YELLOW 3 : GREEN		□ : WITHOUT LED 1 : RED 2 : YELLOW 3 : GREEN

