


# IEC schaltbare Verteilerleisten

Datum 03.99


Seite 1 of 1



- 5 fach IEC Hauptverteilerleiste
- beleuchteter Schalter
- IEC Eingang
- IEC shutter outlets
- Gefilterte oder filterfreie Versionen

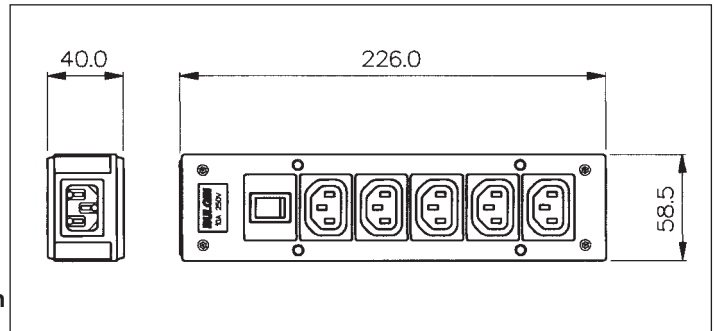

- 5 fach IEC Hauptverteilerleiste
- Beleuchteter Schalter
- 2m Kabel und BS1363 Stecker
- IEC shutter outlets
- Gefilterte oder filterfreie Versionen

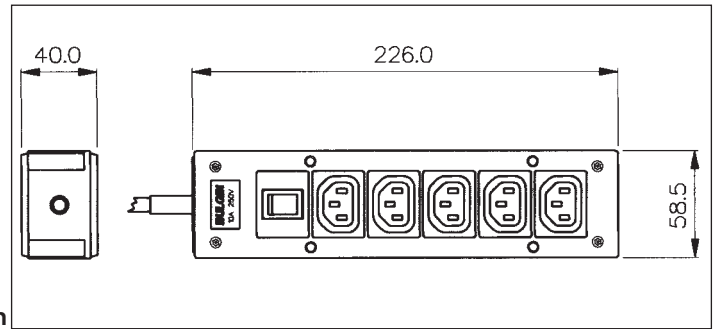

Data	
Mouldings:	Thermoplastic.
Contacts:	Outlets; Tin Plated Brass. Inlets; Nickel Plated Brass.
Voltage Rating:	250V a.c. 50/60Hz.
Current Rating:	10A.
Proof Voltage:	2kV.
Temp. Range:	-5°C to +60°C
Filtered versions	
Max. Earth Leakage Current:	<0.35mA (at 250V, 50Hz).
Capacitor:	2 x 2.2nF (Y), 1 x 15nF (X)
Inductance:	2 x 0.35mH.

Part No.	Inlet	Outlet	Switch	Approvals
PXD301/050/07/1	IEC	5 shuttered	Red	
PXD301/050/08/1	IEC	5 shuttered	Green	
PXD301/550/07/1	IEC	5 shuttered Filtered	Red	
PXD301/550/08/1	IEC	5 shuttered Filtered	Green	
PXD303/050/07/1	2m cable with BS1363 plug	5 shuttered	Red	
PXD303/050/08/1	2m cable with BS1363 plug	5 shuttered	Green	
PXD303/550/07/1	2m cable with BS1363 plug	5 shuttered Filtered	Red	
PXD303/550/08/1	2m cable with BS1363 plug	5 shuttered Filtered	Green	